


INTERNAL SPLICE

2004

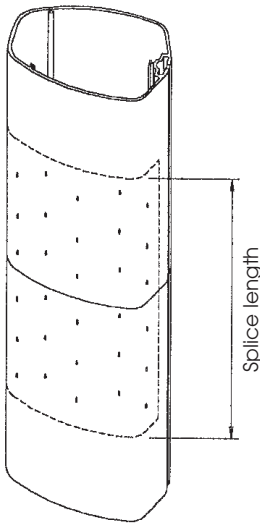

PROFILES	SPLICE LENGTH	REFERENCE
F 67	600 mm	23920067065
F 101	600 mm	23920101065
I 180	800 mm	23950180085
I 260	800 mm	23950260085
I 330	800 mm	23950330085
NG 51	800 mm	23950051085
NG 60	800 mm	23950060085
NG 70	800 mm	23950070085
NG 80	1200 mm	23950080125
NG 86	1200 mm	23950086125
NG 105	1200 mm	23950105125

NOTA :

All the splices are assembled inside the mast sections by rivets or screws.

MAST FITTING



46412046114

Climbing step in stainless steel Ø 5.



46410246133

Aluminium folding step.



49031920904

Combined steaming deck guard in S/s, serie 25.



48011415080

Articulated block, delrin sheave Ø 80.

49031920864

Combined steaming deck guard in S/s, serie 40.