


► INTERNAL SPLICE

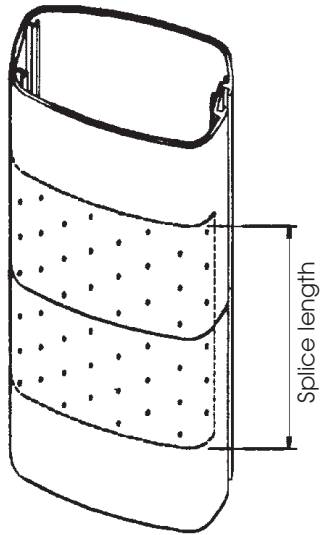

PROFILES	SPLICE LENGTH	REFERENCE
IMS 80	800 mm	23920080085
F 135	800 mm	23920135085
F 195	800 mm	23920195085
F 305	800 mm	23920305085
F 385	800 mm	23920385085
F 460	800 mm	23920460085
F 580	800 mm	23920580085
F 740	1200 mm	23920740125
F 1060	1200 mm	23921060125
F 1395	1200 mm	23921395125
F 2390	1500 mm	23922390155
F 3360	1500 mm	23923360155
F 4600	1500 mm	23924600155

NOTA : All the splices are assembled inside the mast sections by rivets or screws

2004

► MAST FITTING



46412046114

Climbing step in stainless steel Ø 5.



46410246133

Aluminium folding step.



49031920904

Combined steaming deck guard in S/s, serie 25.



48011415080

Articulated block, delrin sheave Ø 80.

49031920864

Combined steaming deck guard in S/s, serie 40.